



DRAWING (mm)

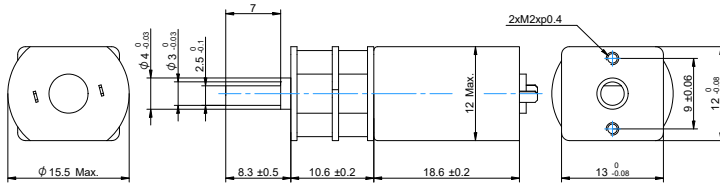

PHOTO



MODEL NO. DESIGNATION

SDS1319 - VOLTAGE - GEAR RATIO - F E

Example: SDS1319-6-10-FE

ACCESSORIES



● C = customizations are offered on demand even for smaller quantities. Typical customizations are indicated with a green dot at column end. Please contact us for any customization request.

GEAR MOTOR DATA

		10:1	21:1	34:1	59:1	75:1	105:1	146:1	203:1	257:1	294:1	360:1
Gear ratio		10:1	21:1	34:1	59:1	75:1	105:1	146:1	203:1	257:1	294:1	360:1
Nominal torque ^ gearbox limit	mNm	2.9	5.9	9.8	15	20	27	33	46	59	68	82
Nominal speed	rpm	950	450	270	160	130	91	65	47	37	32	26
Peak torque	mNm	59	88	88	150	150	240	240	290	290	290	290
Nominal power	W	0.29	0.28	0.28	0.25	0.25	0.25	0.22	0.22	0.22	0.22	0.22
Gearbox efficiency	%	81	73	73	66	66	66	59	59	59	59	59
Gearbox length L	mm	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	11
Weight	g	15	15	15	15	15	15	15	15	15	15	15

OTHER GEAR MOTOR DATA

Service life	h	500	
Performance tolerances	%	±15	
Operating temperature	°C	-10 to 60	●
IP rating		IP20	
Manufacturing standard		ISO 9001 ISO 14001 TS 16949	
CE label UL label		No No	●


GEARBOX DATA

Backlash no load	°	≤ 1.5	
Radial load	N	≤ 3.9	
Shaft axial load	N	≤ 2	
Shaft press fit force max.	N	≤ 20	
Radial play ¹	mm	≤ 0.06	
Thrust play	mm	≤ 0.2	
Bearing type		Sleeve bearing	
Shaft material		Carbon steel AISI 1144	
Motor pinion material		Bronze	●
Motor pinion shape		Straight	
Material gear stage		Bronze, steel	●
Direction of rotation		CW or CCW by reversed V polarity	
Assembly front bell	mm	0.8	

BRUSHED DC MOTOR DATA

Nominal voltage	V	6
No load speed	rpm	12000
No load current	mA	≤ 50
Nominal speed	rpm	9600
Nominal torque	mNm	0.39
Nominal current	mA	≤ 140
Nominal power	W	0.39
Stall torque	mNm	2.3
Starting current	A	0.5
Motor commutation		Prec.m. ³
Motor rotor		Iron
Motor stator		Ferr.m. ⁴
Varistor EMC	V	11 - 17
Capacitor EMC	V	None
Resistance	Ω	12
Inductance	mH	2.6
Insulation class		B

BRUSHED DC MOTOR DATA GRAPH

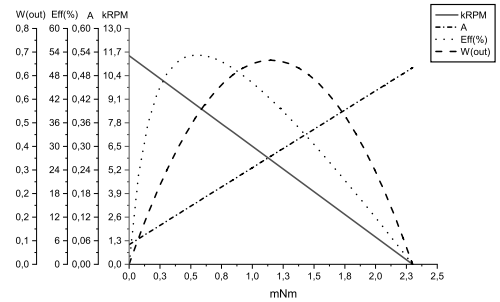

NOTES

- 1.5 mm from gear flange.
- Contact us for information regarding gear stage material of a specific gear ratio.
- Precious metal.
- Ferrite magnet.

MAGNETIC ENCODER DATA

Pulses per revolution		3 x 2	●
Channels		2	
Phase shift	°	90 ± (1/6)T	
Encoder rear cover material		None	
Sensor technical data		Refer externally to brand and part UTC-SK1816.	
Size	mm	Diameter 7 Length 6	
Harness connector		JST ZHR-6 P=1.5-6P	●
Harness cable		AWG26 UL1061	●
Harness length	mm	100	
Connection		BLK M- RED M+ BRN Vcc GRN GND BLU A VIO B	
Supply voltage	V	Min. 5 Max. 20	
Supply current	mA	Ref. 5 Max. 10	
Open collector output		Requires external output resistors.	
Output current per channel	mA	-	