


T3257S (push type)



PHOTO

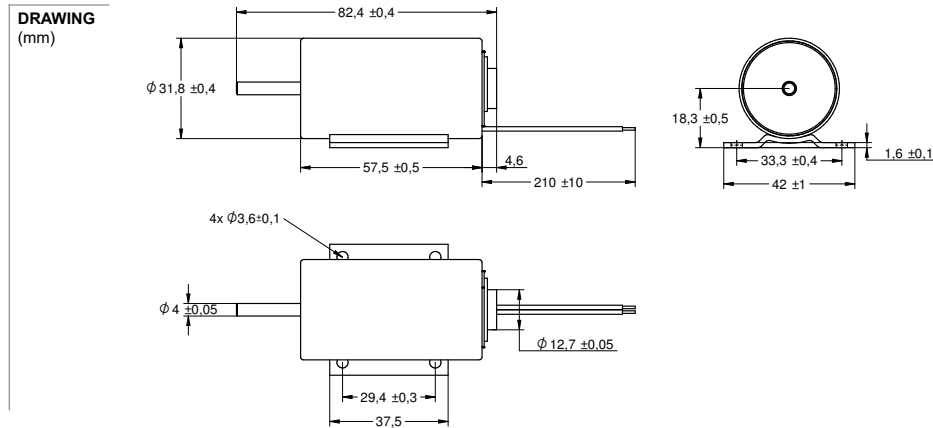

MODEL NO. DESIGNATION

T3257S - VOLTAGE
 Example: T3257S-12V

SOLENOID DATA				
Duty cycle / ED (%) ▶	Continuous (100%)	Intermittent (50%)	Intermittent (25%)	Intermittent (10%)
Watts @ 20°C ▶	12.96	25.92	51.84	129.6
Maximum time in energized state (in seconds) ▶	∞	390	60	18
Part ▼	Resistance (20°C) ± 10% (Ω) ▼	DC Volts (V) ▼		
T3257S-06V	2.77	6	8.5	12
T3257S-12V	11.07	12	17	24
T3257S-24V	44.3	24	34	48

SOLENOID FEATURES AND STANDARD DATA		
	STANDARD	CUSTOMIZATION OPTIONS
Type	Push type DC solenoid	Push type DC solenoid
Cable	Flying wire 230mm	Length, type and connector
Voltage	6 to 24 VDC @ 100% ED	Other voltages upon request
Life time	At least 500.000 single strokes	
Plunger material	Carbon steel 12L14	
Protection class	IP50	
Insulation grade	B	
Operating temperature	-5°C ... +40°C	
Manufacturing quality standards	ISO9001:2008, ISO/TS 16949:2002	
RoHS compliance	Yes	
CE approval	No	
UL approval	No	

ADDITIONAL DATA	
Return spring	Yes
Weight	295g

SPRING DATA	
Loading force @ 10mm compression	210 ± 10g



DIAGRAM

